


PRO28F Screening Line



Premium compact solution

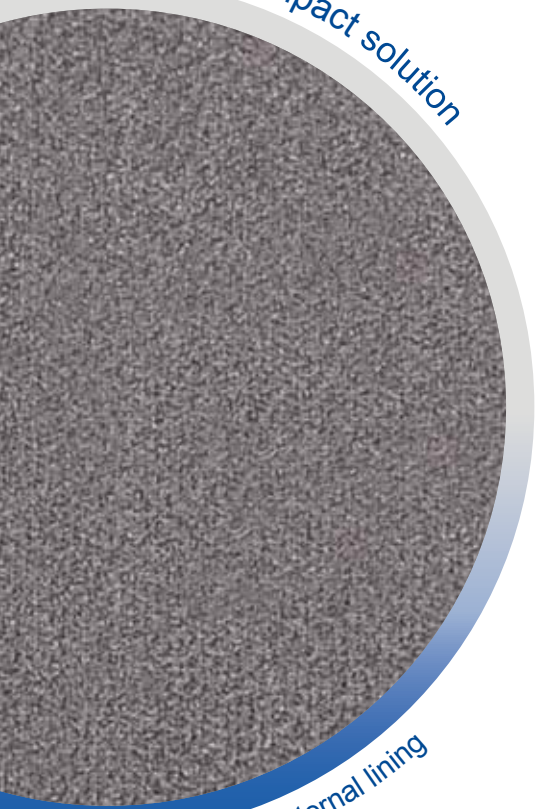

New sanitizable internal lining



PRO28F



All our cabins offer the best of Italian design

- Mini soundproof booth with high performance
- Complies to ISO 8253 1:2010*
- Innovative materials for a perfect internal acoustics
- Quick and easy installation with magnetic, reversible door
- Available with DIY kit
- Integrated silenced ventilation system



Product conforms to regulation (EU) 2017/745 on Medical Devices



Folding table and connection panel

Technical specification

Code	Outside Dimensions (LxWxH)	Inside Dimensions (LxWxH)	Ext. sq.m	Weight
P28FW	96 x 96 x 197 cm	81 x 81 x 173.5 cm	0.92	233 Kg

PRO28F can be equipped with 4 wheels and converted in portable booth (height on wheels 208h cm).

Applications

PRO28F line is an excellent noise reduction booth, is recommended for hearing screening and diagnostic tests in audiology centers and shops for those who have limited space available and need a very small soundproof booth.

These booths can be also used in temporary situations for occupational medicine, in companies and schools. Ideal solution for mobile audiology units.

Exterior

The exterior finishing is made of a white, highly-resistant, fireproof, washable panel.

Interior

The internal finishing composed by a special soundproofing fiber covered with a sanitizable, fireproof, highly resistant acoustic material which provides the cabin with a perfect acoustics.

Sanitation of the interior

The internal lining can be sanitized according to directives of the Ministry of Health using a damp cloth with colorless alcohol-based spray sprayed to at least 30 cm of distance.

Door

The door is reversible with magnetic closing. The opening (right or left) can be decided upon assembling the booth and changed in 5 minutes.

Clear opening 55 x 168 cm (w x h).

Window

The window consists of a special double safety glass. Clear view 52 x 52 cm (w x h).

Floor

The floor is layered with different materials and it stands on anti-vibration adjustable feet. Finishing: technical, antistatic, fireproof, washable carpet.

Ventilation system

Air ventilation is included and guaranteed by a silent forced ventilation system.

Connecting instruments

Cables are laid through a new universal soundproof panel without jack connection. All kinds of cables can be used without the need to be cut. Adaptable to all types of instruments. Hangers for earphones are included.

Electrical system

Lighting is ensured by a lamp with low energy consumption.

Power supply: 230 V. 50-60 Hz.



Noise reduction PRO28F line is tested at the Technical-Physics Laboratory C.S.I. S.p.A. (Milano-Italy) accredited by ACCREDIA. *Product conforms to international UNI EN ISO 8253 1:2010 with a background noise no greater than 65dB (at 500Hz) assuming a noise barrier headset (audiocups) is used.

Acoustic insulation

Hertz	125	250	500	1000	2000	3150	4000	6300	8000
dB	21.7	25.6	32.6	36.2	34.0	37.7	41.1	41.6	43.0

Optional Equipment

- External folding table (79 x 50 cm)
- Internal folding table (79 x 32 cm)
- Audiocups
- Kit 10 or 6 jack cable extensions
- Jack panel (10 jack + USB)
- Modification Voltage 110 V.
- Vertical window strip (16 x 115 cm)
- Wall audiometer support
- Internal seat
- Kit 4 castors (2 with brake)

Installation

Easy and quick to install; no specialized staff required. Just follow the instructions. Thanks to reduced weight and small size can be easily set up in 5 minutes and transported in a Station Wagon car.

Notes

The materials are fireproof at the origin. Specifications are subject to change without notice.
Warranty: limited to one year from delivery date.

Packaging

Delivered for shipping in a ISPM wooden case with DIY kit

Standards

Medical Device Class I
EU 2017/745 (old EEC 93/42)
2007/47/EC - CEI 64/11
CEI 64/8 - 2006/95/EC
UNI EN ISO 8253 1:2010.

